SxV Soldering Tips

Compatible with: PS-900, MFR-1120, MFR-2220, MFR-2222 Systems, PS-HC3 and MFR-H2-ST hand-pieces, PS-CA3 and MFR-CA2 Coil Assemblies

CHISEL

NEW 	SFV-CH10A STV-CH10A SCV-CH10A	Chisel *Optimised for thermal performance* 1.0mm x 18.3mm (.04" x .719")
OLD STYLE 	SFV-CH10AR STV-CH10AR SCV-CH10AR	Chisel *Original Easy Access Geometry* 1.0mm x 13.7mm (.04" x .54")
	SFV-CH10 STV-CH10 SCV-CH10	Chisel 1.0mm x 11mm (.04" x .43")
NEW 	SFV-CH15A STV-CH15A SCV-CH15A	Chisel *Optimised for thermal performance* 1.5mm x 11.3mm (.06" x .44")
OLD STYLE 	SFV-CH15AR STV-CH15AR SCV-CH15AR	Chisel *Original Easy Access Geometry* 1.5mm x 13.4mm (.06" x 528")
	SFV-CHB15 STV-CHB15 SCV-CHB15	Chisel Bent 30° 1.5mm x 12.2mm (.06" x .48")
	SFV-CH18AR STV-CH18AR SCV-CH18AR	Chisel *Original Easy Access Geometry* 1.8mm x 13.4mm (.07" x .528")
	SFV-CH20 STV-CH20 SCV-CH20	Chisel 2.0mm x 11mm (.08" x .43")
NEW 	SFV-CH24A STV-CH24A SCV-CH24A	Chisel Long Reach *Optimised for thermal performance* 2.4mm x 18.3mm (.094" x .719")
	SFV-CH25AR STV-CH25AR SCV-CH25AR	Chisel *Original Easy Access Geometry* 2.5mm x 13.4mm (.10" x .528")

F = FR4 / Fiber Glass, for most standard applications T = Temperature Sensitive C = Ceramic for high thermal demand applications.

SxV Soldering Tips	Compatible with: PS-900, MFR-1120, MFR-2220, MFR-2222 Systems, PS-HC3 and MFR-H2-ST hand-pieces, PS-CA3 and MFR-CA2 Coil Assemblies	
CHISEL		
	SFV-CH25 STV-CH25 SCV-CH25	Chisel 2.5mm x 11mm (.10" x .43")
	SFV-CH30AR STV-CH30AR SCV-CH30AR	Chisel *Original Easy Access Geometry* 3.0mm x 13.4mm (.12" x .528")
NEW 	SFV-CH50A STV-CH50A SCV-CH50A	Chisel *Optimised for thermal performance* 5.0mm x 11.3mm (.20" x .44")
OLD STYLE 	SFV-CH50AR STV-CH50AR SCV-CH50AR	Chisel *Original Easy Access Geometry* 5.0mm x 11.7mm (.197" x .461")
	SFV-CH50 STV-CH50 SCV-CH50	Chisel 5.0mm x 10mm (.20" x .4")
CONICAL		
OLD STYLE 	SFV-CNL03AR STV-CNL03AR SCV-CNL03AR	Conical Long Reach *Original Easy Access Geometry* 0.3mm x 18.4mm (.01" x .724")
NEW 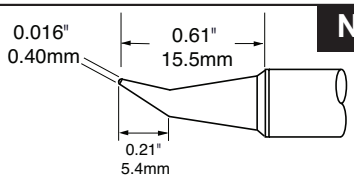	SFV-CNB04A STV-CNB04A SCV-CNB04A	Conical Bent Long Reach *Optimised for thermal performance* 0.4mm x 15.5mm (.016" x .61")
NEW 	SFV-CN05A STV-CN05A SCV-CN05A	Conical Long Reach *Optimised for thermal performance* 0.4mm x 18.2mm (.016" x .72")
OLD STYLE 	SFV-CNB04AR STV-CNB04AR SCV-CNB04AR	Conical Bent *Original Easy Access Geometry* 0.4mm x 19.6mm (.016" x .77")
	SFV-CNL04 STV-CNL04 SCV-CNL04	Conical 0.4mm x 13.6mm (.016" x .53")

F = FR4 / Fiber Glass, for most standard applications T = Temperature Sensitive C = Ceramic for high thermal demand applications.